




# MUR15D60 15A Super Fast Recovery

## Features:

- High surge capacity
- Low Forward Voltage Drop.
- High Current Capability.
- Super Fast Switching Speed For High Efficiency

TO-220F -2L



1. Cathode      3. Anode

## Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	MUR 15D05	MUR 15D10	MUR 15D15	MUR 15D20	MUR 15D30	MUR 15D40	MUR 15D60	Unit
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
Maximum RMS Voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	$V_{R(DC)}$	50	100	150	200	300	400	600	V
Average Rectified Forward Current Total Device	$I_{F(AV)}$	15							A
Nonrepetitive Peak Surge Current(Surge applied at rated load conditions half wave, single phase, 60 Hz)	$I_{FSM}$	200							A
Operating Junction Temperature and Storage Temperature	$T_J, T_{stg}$	-65 to +175							°C
Maximum Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.0				2.0			°C/W

## ELECTRICAL CHARACTERISTICS

Parameter	Symbol	MUR 15D05	MUR 15D10	MUR 15D15	MUR 15D20	MUR 15D30	MUR 15D40	MUR 15D60	Unit
Forward Voltage ( $I_F = 15A, T_C = 25^\circ C$ ) (Note 1) ( $I_F = 15A, T_C = 150^\circ C$ )	$V_F$	0.975 0.895			1.30 1.00		1.70 1.50		V
Maximum Instantaneous Reverse Current (Note 1) (Rated DC Voltage, $T_C = 25^\circ C$ ) (Rated DC Voltage, $T_C = 150^\circ C$ )	$I_R$	5 250			10 500			$\mu A$	
Maximum Reverse Recovery Time ( $I_F = 0.5A, I_R = 1.0A, I_{REC} = 0.25A$ )	$T_{RR}$	35							ns

Note 1.Pulse Test: Pulse Width = 300  $\mu$ s, Duty Cycle  $\leq 2.0\%$



Typical Characteristics





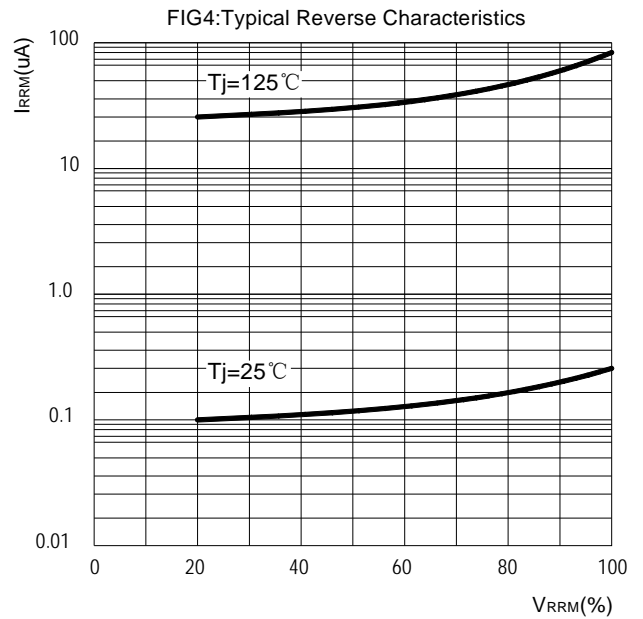



Diagram of circuit and Testing wave form of reverse recovery time

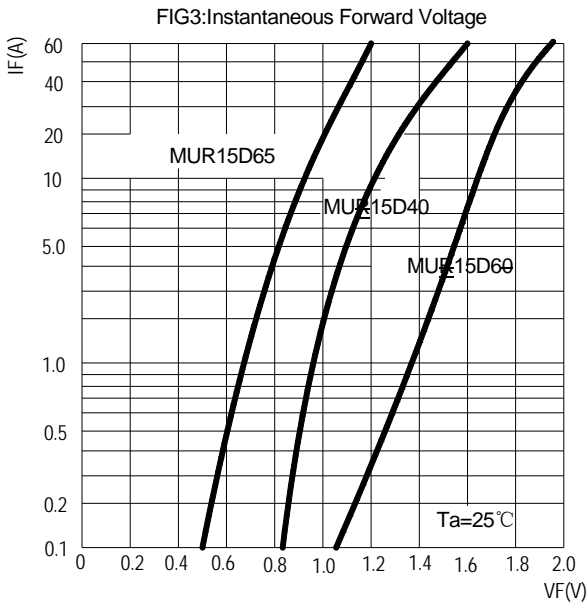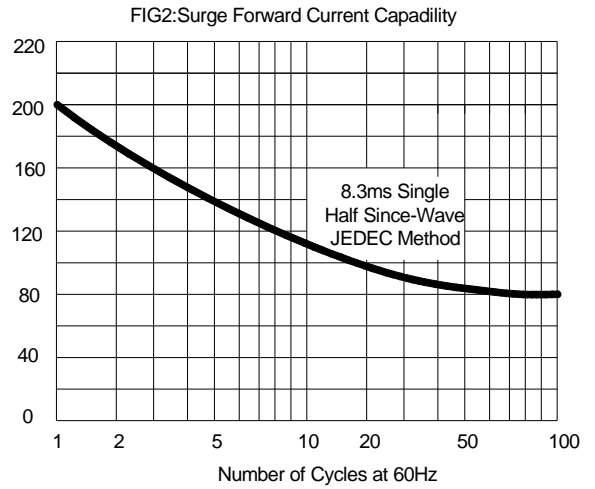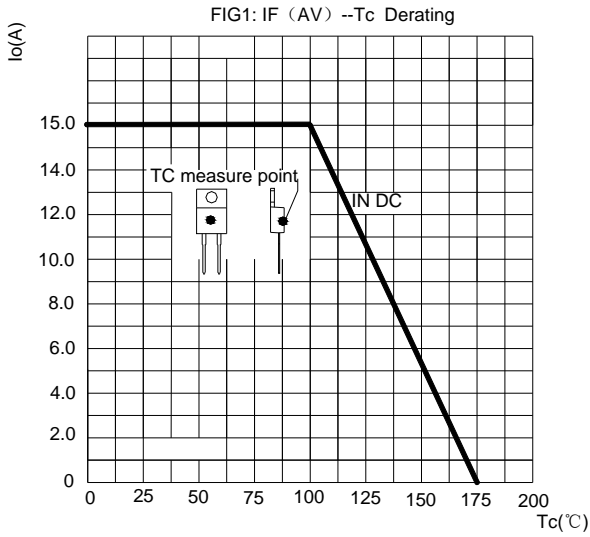

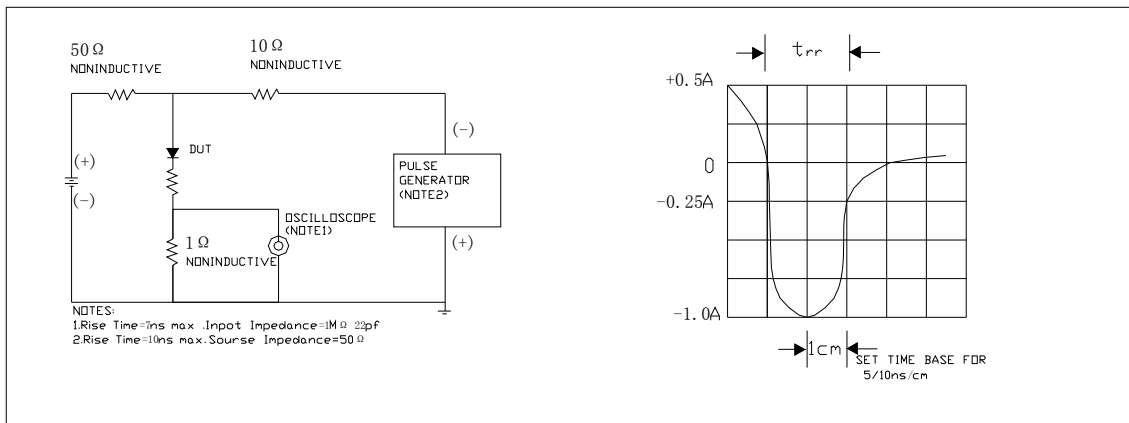

**Package Dimension**

TO-220F -2L

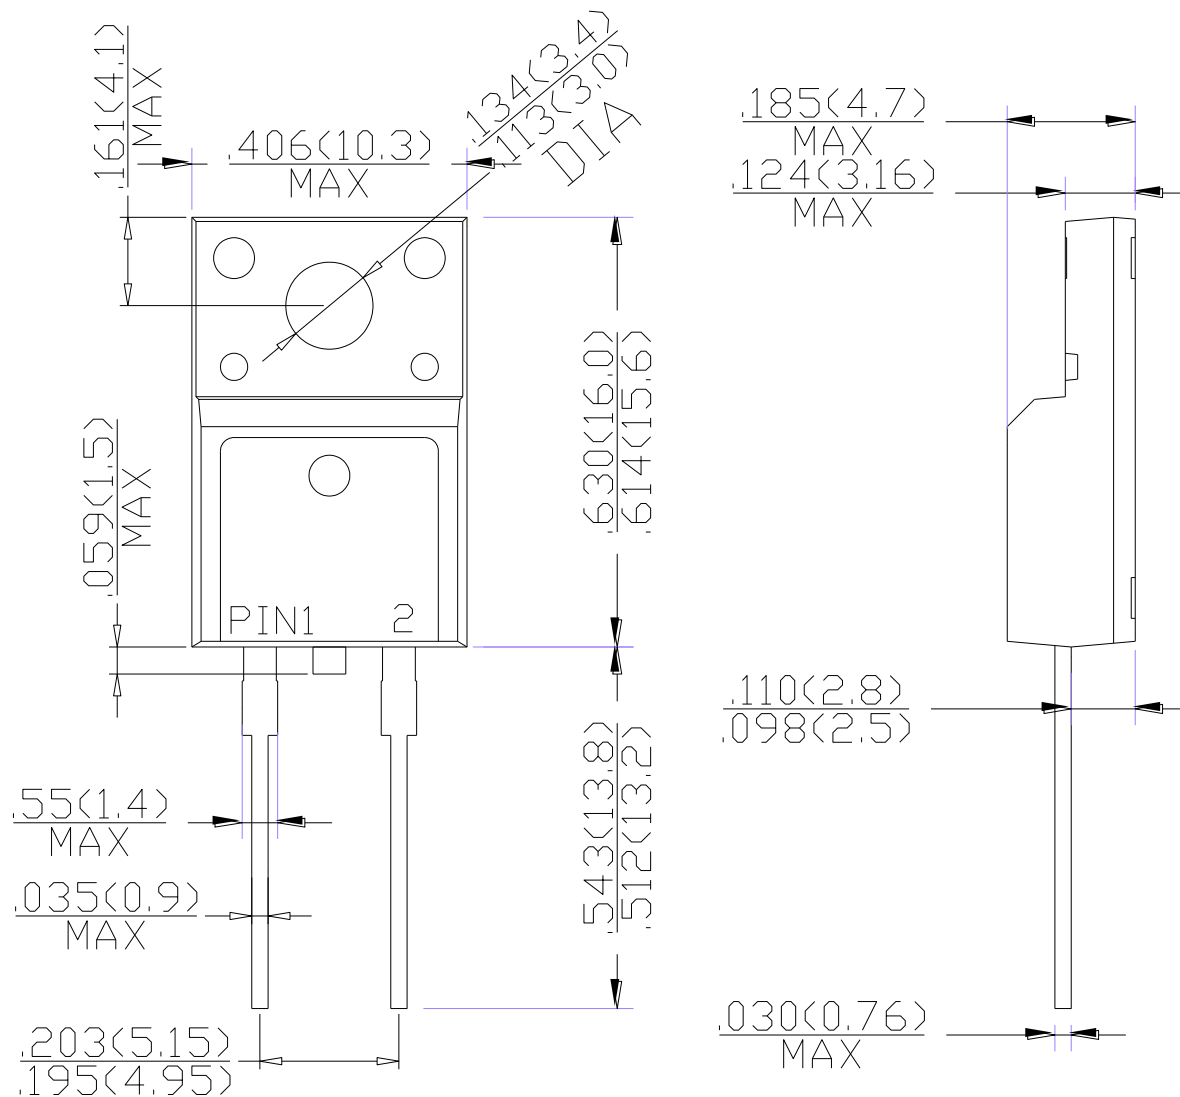

Dimensions in inches and (millimeters)